
PONY™ | JORGENSEN™

#60P

OWNER'S GUIDE
GUIDE DE L'UTILISATEUR
INSTRUCCIONES DE USO

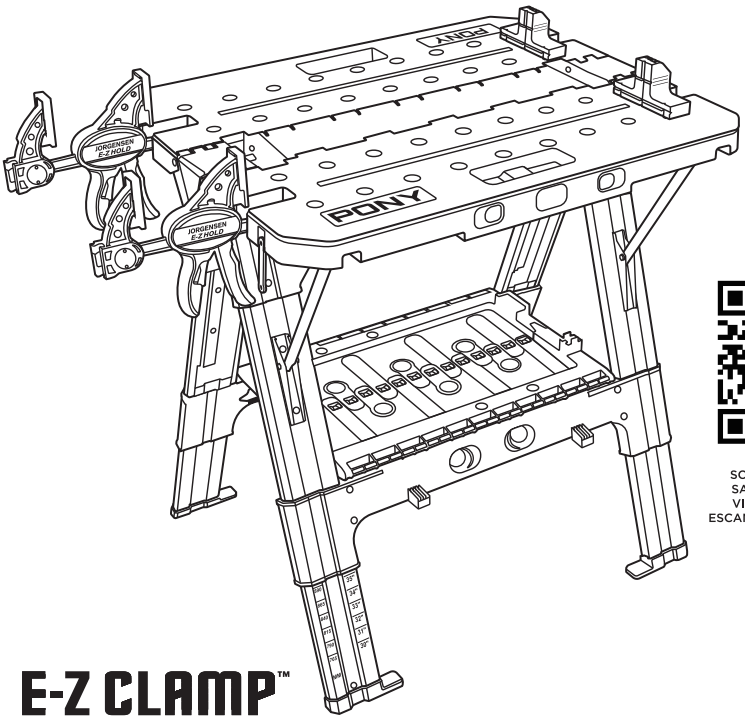

SCAN TO VIEW VIDEO
SAISIR L'IMAGE POUR VISIONNER LA VIDÉO
ESCANEAR PARA VER VÍDEO

E-Z CLAMP™

HEAVY DUTY FOLDING WORKTABLE
TABLE DE TRAVAIL PLIANTE HAUTE RÉSISTANCE
MESA DE TRABAJO PLEGABLE DE USO INDUSTRIAL

PONY | JORGENSEN
Saddle Brook, NJ 07663 USA
ponyjorgensen.com
Made in China I Fabriqué en Chine I Hecho en China

Rev 11/2023

IMPORTANT

Please read the instructions in this booklet thoroughly before use. Understanding how this worktable works and setting it correctly is fundamental to obtaining a satisfactory result.


WARNING

Read all safety warnings and all instructions. Failure to follow the warnings and instructions may cause injury and misuse. Failure to comply with the safety instructions will invalidate the limited warranty. Save all warnings and instructions for future reference.

WARNING: Pinch points

INCLUDED

A	WorkTable	
B	E-Z HOLD® Clamp (2 pieces)	Model # 33412
C	Bench Dogs (Big x 2, Small x 2)	Model # 60301

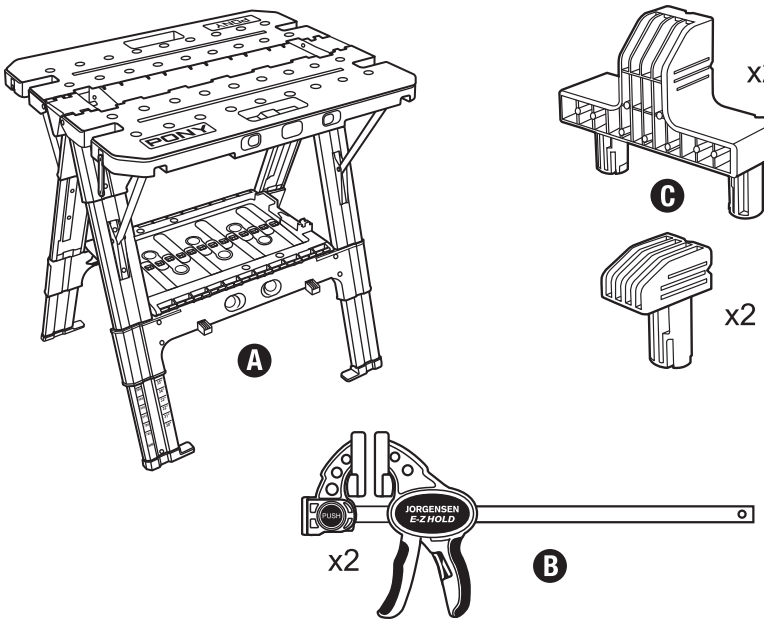

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please contact customercare@ponyjorgensen.com as soon as possible.

IMPORTANT SAFETY INSTRUCTIONS

1. Do not load with more than 500 lbs. (227 kg) on the open table position. Do not leave heavy loads on work surface for extended periods of time.
2. Ensure WORKTABLE is set up on firm, level ground. Check for stability before each use.
3. Do not apply an unbalanced load which could cause the WORKTABLE to tip over.
4. Do not use the tabletop as a stepladder or standing platform. Do not use the lower tool tray as a stepping stool.
5. Be sure that the legs are fully open and locked.
6. On both open worktable or folded sawhorse positions the product should be securely locked before use.
7. Avoid applying excessive force when clamping with the supplied clamps.
8. Safety attire guidelines:
   - Do not wear loose clothing or jewelry, which can be caught in moving parts.
   - Non-skid footwear is recommended when working outdoors.
   - Secure long hair or wear protective hair covering to avoid it getting caught and potential injury.
9. Recommended personal protective equipment:
   - Use safety glasses.
   - Use face or dust mask when working operations that create or involve dust.
10. Do not cut or drill into the work surface as it may weaken supports and/or damage the product.
11. Caution required when using high temperature tools (heat guns, torch, solder iron, etc.) may damage work surface and/or reduce clamping capability.
12. Do not store flammable liquids on the WORKTABLE.
13. When not in use, tools should be stored in a secure, dry place, out of the reach of children and unauthorized usage.

SPECIFICATIONS

Weight Capacity / WORKTABLE	500 lbs
Weight Capacity / Sawhorse	1000 lbs
Max Weight Capacity for Tool Tray	20 lbs
Table Top Dimensions	31" x 25"
Max Clamping Span	29.5"
Max Working Height	35"
Weight	32 lbs

Check ponyjorgensen.com for product or distributor information.

Scan to view introduction video

OPERATION: OPENING THE WORKTABLE

The portable clamping WORKTABLE is packaged completely folded.

To open:

1. Place the WORKTABLE upright on the floor.
2. Step on the 4 telescopic legs of the WORKTABLE with your both feet at the same time to lift the WORKTABLE up. Make sure all four telescopic legs are pulled out and locked in place. (Figure 1)
3. Unlock the safety straps on both sides. (Figure 2)
4. Open the legs fully until the tool tray is flat. The table legs and tool tray should create an “A” shape. (Figure 3)
5. Raise each side of the tabletop with one hand, press the button inward, and with the other hand lift the supporting bars and snap it into the slot under the tabletop. Then release the button so the supporting bar is fixed and the table top is stable. (Figure 4)

WARNING: BEFORE EACH USE, CHECK AND MAKE SURE THAT THE TABLETOP IS STABLE AND SUPPORTED BY THE SUPPORTING BAR.

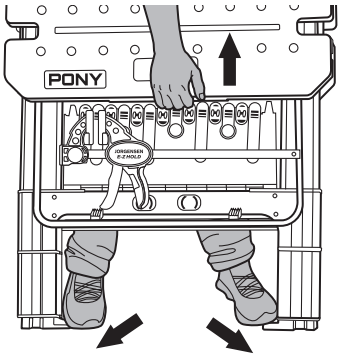


Figure 1

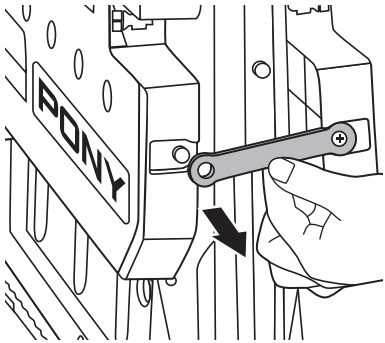


Figure 2

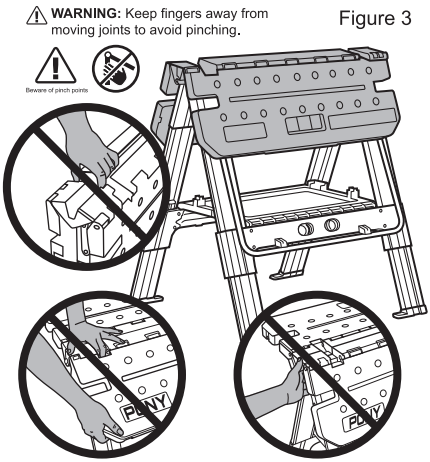


Figure 3


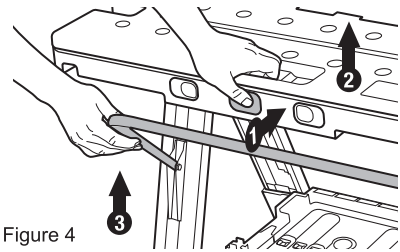


Figure 4

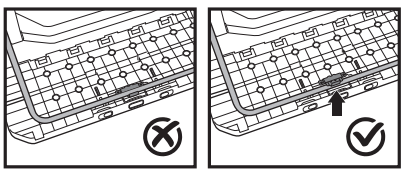

Supporting bar NOT inserted into the slot

Supporting bar inserted into the slot

ADJUSTABLE CLAMPS

Store the trigger clamp in the designated slots on the tool tray.

First insert the stationary jaw of the clamp into the slot on the left side of the tool tray, and then insert the bar of the clamp into the slot on the right side of the tool tray. (Figure 5)

Take down the trigger clamp from the worktable.

Remember to take the clamp from the right side first and then the whole clamp can be pulled out easily.



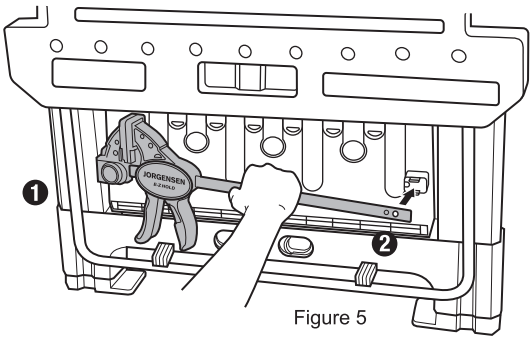


Figure 5

Adjust the trigger clamp according to your needs. (Figure 6)

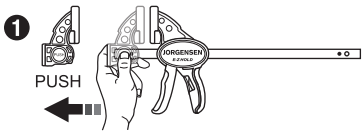

Remove the stationary jaw from the clamp by pushing the press button.

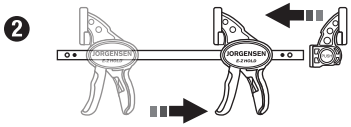

Sliding the moveable jaw along the bar of the clamp to the other end.

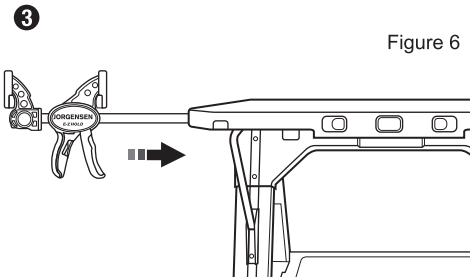


Figure 6

Insert the trigger clamp to the slot on the sides of the worktable.

Pull out the button closest to the side you are using and align the trigger clamps with the slot and insert it fully as shown. Once the clamps are inserted, release the button. (Figure 7)

Push the bench dogs into the desired holes on the table. (Figure 8)

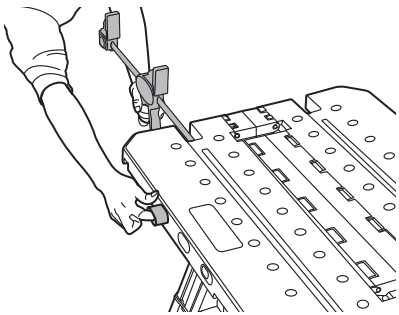


Figure 7

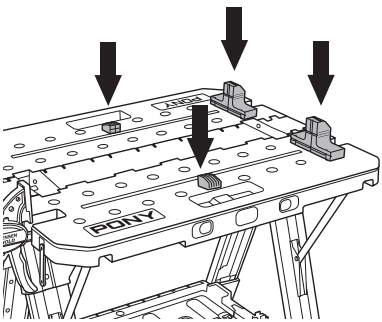


Figure 8

Bench dogs and trigger clamps can be used for multiple clamping options.

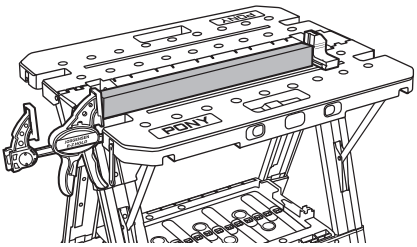


Figure 9

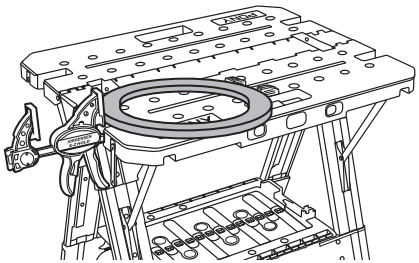


Figure 11


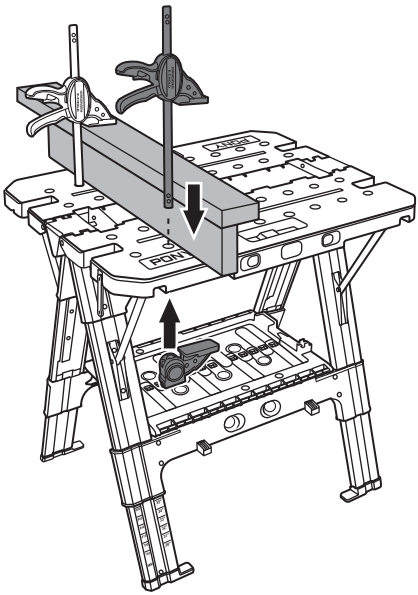


Figure 10

12" E-Z HOLD® Trigger Clamps can be used independently if desired.

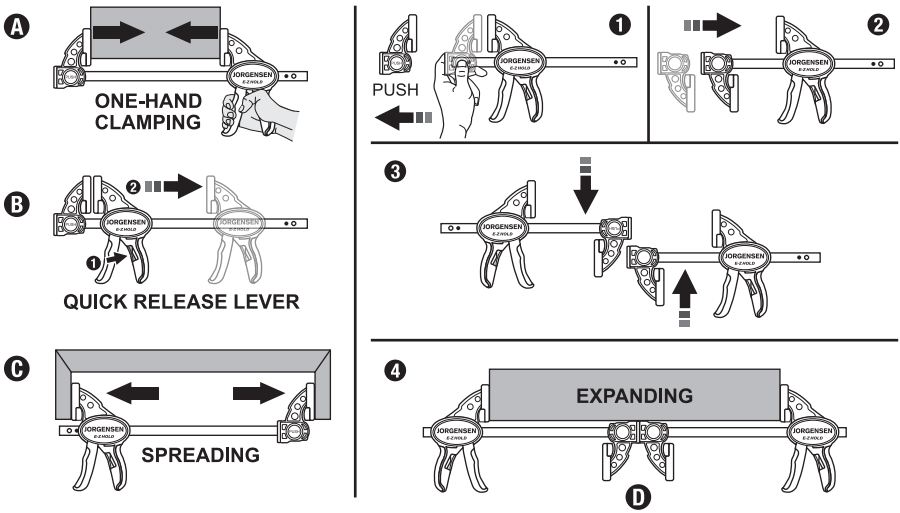


* Pony™ E-Z Clamp™ worktable works with the current Jorgensen®, Irwin®, Bessey® & DeWalt® medium duty clamps for both vertical and horizontal clamping.

(1) May subject to each brand's spec changes.
(2) All brands are registered trademarks of their respective owners.

Telescoping legs allow for different WORKTABLE height needs. It allows for 6 Adjustable height: 30"(765mm); 31"(790mm); 32"(815mm); 33"(840mm); 34"(865mm); 35"(890mm)

Caution:

1. Make sure to adjust the telescopic legs only when the tabletop is folded.
2. If you want to adjust the telescopic legs when tabletop is flat, make sure nothing is left on the table.

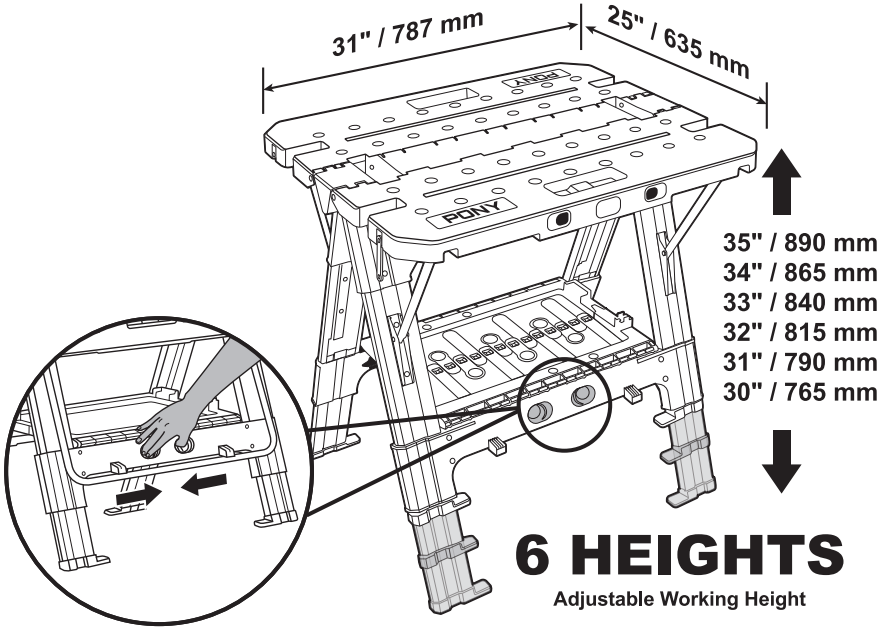

Use the recesses and built-in tool tray for hardware and other parts storage.

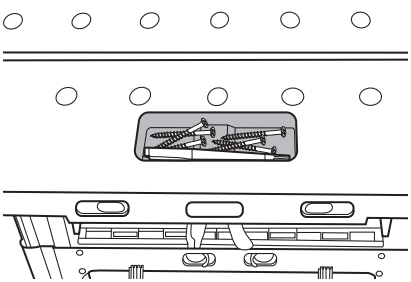


Figure 12

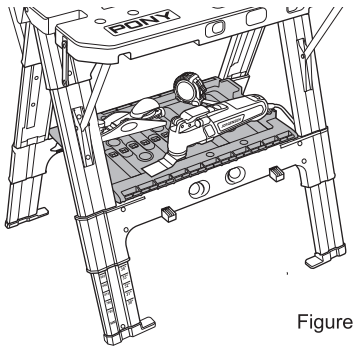


Figure 13

OPERATION: CLOSING THE WORKTABLE

1. Put down the supporting bar as shown in (Figure 14). Push the middle button on the tabletop, lift up the tabletop and pull down the supporting bar.

2. Lift the tool tray in the center to allow the legs to fold. (Figure 15)

3. Use the safety straps to fix the table on both sides.(Figure 16)

4. Carry the folded WORKTABLE easily. (Figure 17)

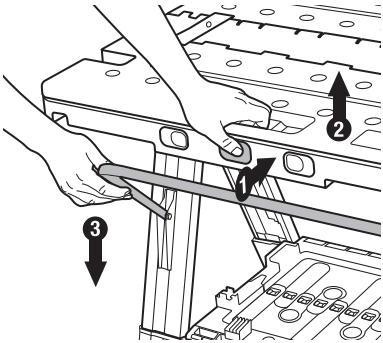


Figure 14

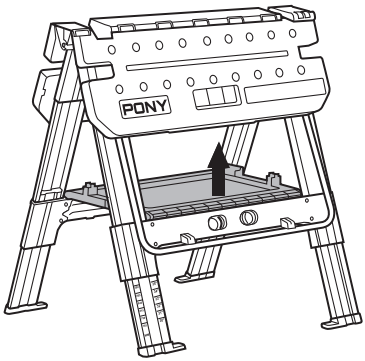


Figure 15

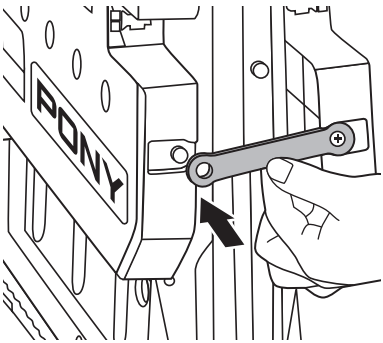


Figure 16

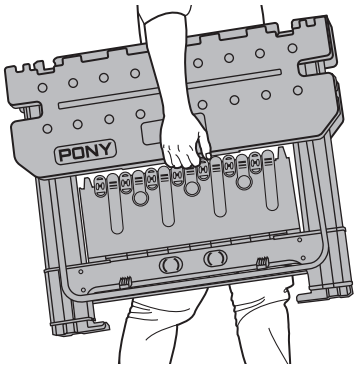


Figure 17

WARNING: Keep fingers away from moving joints to avoid pinching.



